

# Pallet Scale

Type : KPZ 1 NEX


For continuous operation zone 1  
Stainless steel - Material 1.4301



## Example of division of the zones

Gas: Zone 0,1 and 2

Dust: Zone 20,21,22

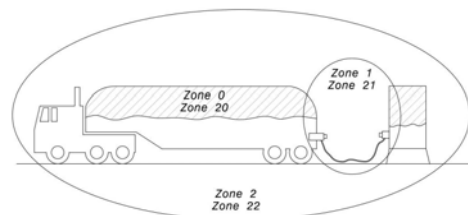

## Standard power supply

**II 2 G c IIC T4 -10°C ≤ Ta ≤ +50°C**

Gas: manual devices described as above.

**II 2 D c T117°C IP66 -10°C ≤ Ta ≤ +50°C**

Dust: manual devices described as above.

## Akku version

**II 2 G c IIC T3 10°C ≤ Ta ≤ +40°C**

Gas: manual devices described as above.

**II 2 D c T193°C IP6X -10°C ≤ Ta ≤ +50°C**

Dust: manual devices described as above.

## KNORRING OY AB

Karvaamokuja 6, PL20

00380 HELSINKI

puh. 09-56041, fax 09-5652463

e-mail: [knorring@knorring.fi](mailto:knorring@knorring.fi)

web: [www.knorring.fi](http://www.knorring.fi)

Jyväskylä: puh. 014-614100

Turku: puh. 02-4355158