


Oil Condition Sensor - Type OCS-I-M-B08-M16

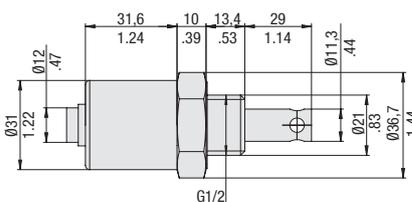

Product Description

The Oil Condition Sensor OCS is designed for continuous monitoring of hydraulic systems. Permanently installed in the system the OCS sensor monitors the condition of hydraulic fluids and lubricating oils in real time, whereby water ingress and oxidation can be detected in time. The OCS sensor is 60 times more sensitive than dielectric sensors on increasing contamination and protects the system from cost-intensive downtimes and reduces machine downtimes.

Technical Data

Materials

- Stainless Steel (corrosion-resistant Steel) AISI304, 1.4301

Dimensions

- 90 x 37 mm / 3.54 x 1.46 in

Weight

- 160 g / .35 lbs

Sealing Material

- FKM (Viton®)

Features

- Robust construction
- Usage under extreme conditions with temperatures from -20 °C to +120 °C / -4 °F to +248 °F
- Suitable for use at operating pressures up to 20 bar / 290 PSI

Max. Burst Pressure

- 20 bar / 290 PSI

Media Temperature

- 20 °C ... +120 °C / -4 °F ... +248 °F

Media Compatibility

- Mineral and Synthetic Oil
(Please contact STAUFF for other fluids)

Process Connection

- G1/2

Order Code

OCS-I-M-B08-M16



① Series

Oil Condition Sensor (only) **OCS-I-M-B08-M16**

Electrical Connection

- 6-pin connection plug

Power Supply

- 9 ... 30 V DC

Analog Output

- 4 ... 20 mA

Computer Interface

- RS485

Protection Rating


- IP67

USB Interface - Type Interface-OCS-I-USB

Product Description

The OCS sensor respectively the Display-OCS-I can be connected to a PC or laptop using the Interface-OCS-I-USB. It allows you to download the measured data and to carry out programming using the supplied software.

The Interface-OCS-I-USB was not designed for a permanent operating and should be used for programming the OCS sensor respectively download the measured data from the Display-OCS-I only.

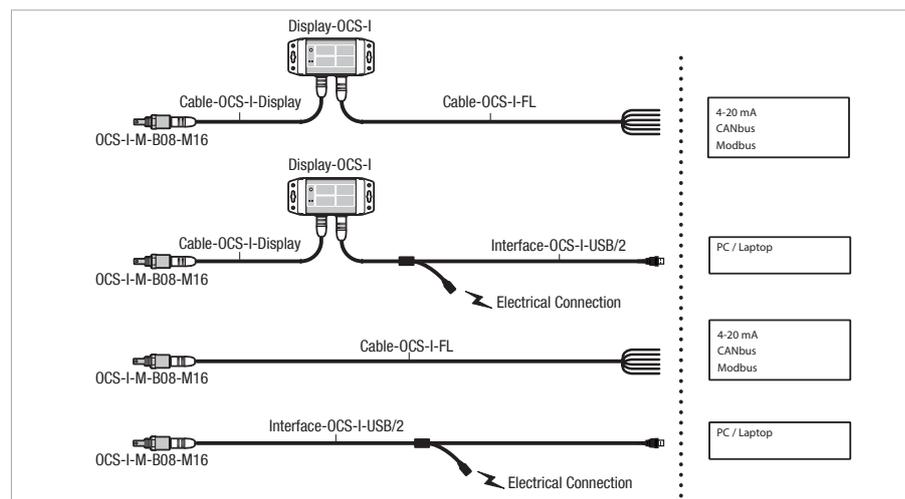

Order Code

Cable-OCS-I-Display



① Series

Connection Cable **Cable-OCS-I-Display**

Order Code

Interface-OCS-I-USB/2



① Series

Connection Cable **Interface-OCS-I-USB/2**

Order Code

Cable-OCS-I-FL




① Series

Connection Cable **Cable-OCS-I-FL**



Oil Condition Display ■ Type Display-OCS-I

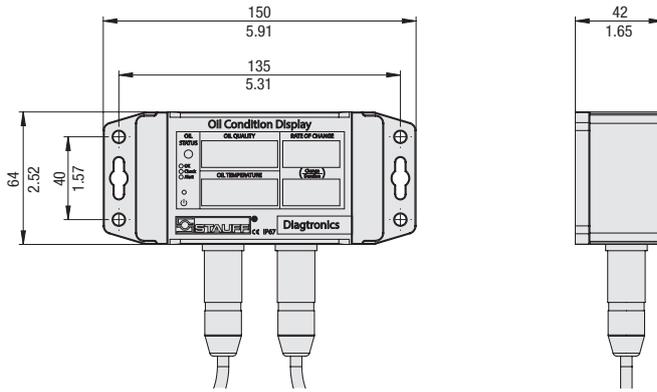

Order Code

Display-OCS-I



① Series

Oil Condition Display OCS **Display-OCS-I**

Product Description

The optional Oil Condition Display OCS unit shows the values measured by the sensor using a multi-segment LED indicator, which makes the oil condition apparent at a glance and without any connection to a PC.

The display unit also has integrated measurement value memory, from which the data can be subsequently transferred for assessment via USB.

Technical Data

Materials

- Polycarbonate

Dimensions

150 x 64 x 42 mm / 5.91 x 2.52 x 1.65 in

Weight

- 250 g / .35 lbs

Power Supply

- 9 ... 30 V DC

Analog Output

- 4 ... 20 mA

Computer Interface

- RS485, 9600 Baud (half duplex)

Mounting

- Mounting flange on back side
150 x 64 mm / 5.91 x 2.52 in

Protection Rating

- IP67

Display

- Multi-segment LED indicator
(20 segments: 13 green LED, 4 amber LED, 3 red LED, 1 red LED (Unit ON))

Order Code

Starterkit-OCS-I



① Series

Starterkit **Starterkit-OCS-I**

Includes

- 1x Oil Condition Sensor - Type OCS-I-M-B08-M16
- 1x Oil Condition Display - Type Display-OCS-I
- 1x Connection Cable - Type Cable-OCS-I-Display
- 1x Connection Cable - Type Interface-OCS-I-USB/2
- 1x Connection Cable - Type Cable-OCS-I-FL

Starterkit ■ Type Starterkit-OCS-I

