

INDUSTRIAL QUALITY
Stainless steel
DIN 1.4301



B e n c h S c a l e I P 6 9 K

KPZ 2E-06-N IP 69K

Stainless Steel DIN 1.4301



Industrial quality
Easy to operate
Zero setting
Indicator housing IP 69K
Serial interface

K-PZ Wagi • tel: +48 61 44 21 189 • fax: +48 61 44 21 190 • E-mail: info@kpzwagi.pl

KPZ - Scales, ROBUST, INEXPENSIVE, and GOOD!!!

INDUSTRIAL QUALITY
Stainless steel
DIN 1.4301



Bench scale type KPZ 2E06NK, IP69K, precise, robust and reliable, for universal use, with or without EC approval. Stainless steel (material DIN 1.4301)

Construction: high quality, industrial scale, long service life, stable and solid construction, stainless steel frame made of profile (**material DIN 1.4301**), with high quality load cells stainless IP69K.



Load cells: high quality, stainless steel, EC approved DMS type 504E-2, IP 69K (standard), OIML C3,. Cable length between scale and indicator about 2,5m. Adjustable feet. Operating temperature: from -10°C to + 50°C.

Indicator: Type KPZ 51E-34K (delivery without indicator possible), can be used in different ways: 1st version: as a mounted stand to the shorter side of scale; 2nd version: as a mounted stand to the longer side of scale (stand height 300x400= 400 mm, rest 650 mm); 3rd version: without stand, bench version or screwed to the wall (in that version wall grip need to be additionally ordered) (cable length about 2,5m).

Certification: EC approval possibility class III, Declaration of Conformity.



Indicator KPZ 51E-34K

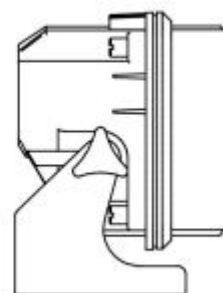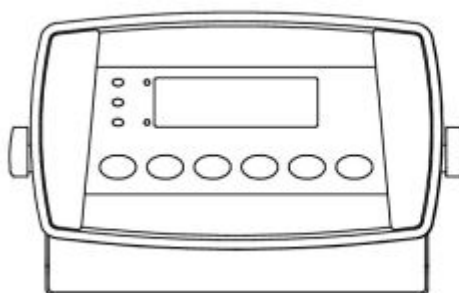

M

Technical data: Description: **KPZ 51E-34K** robust, stainless steel housing **IP 69K**, can be used in food and fish industrie, chemical and pharmaceutical industrie, agriculture. KPZ 51E-34K is resistant for high pressure (100bar) and high temperatures (up to +80°C) User-friendly, large function keys. LCD display: 6 digit, various symbols, backlight, high of digits 20 mm. High sensitivity sensors, keyboard can be used even with gloves on!!! Operating temperature from -10°C up to +50°C ,storing temperature -20°C up to +50°C. Mains 110/240 V AC 50/60Hz with output 12VDC 1.2A external battery or optional internal battery.

Functions: automatic and manual zero setting, switch Net/Gross weight, 100% tare, multiple tare, unit switching, simple piece counting. Possibility to enter data and bring out data through serial interface (optional): computer functional control , possibility of choosing different exit formats, edition activation : via computer, continuously or after zero come back. Minus indication, LCD backlight, automatic shut off after 0-9 minutes, pre-set value control or limit value control LOW – OK - HIGH (any two weight values to choose, tone or light signal), electronic stabilization filter, and signal distortion, automatic selftest, error messages.

Indication: zero setting, gross, net, stability, LOW-Bat indication, pre-set/limit value, too small piece quantity or too small weight.

Options: serial interface RS 232, battery, label printer.

K-PZ Wagi • tel: +48 61 44 21 189 • fax: +48 61 44 21 190 • E-mail: info@kpzwagi.pl

KPZ - Scales, ROBUST, INEXPENSIVE, and GOOD!!!

We reserve the right to make technical modifications and price changes without prior notification